

输出功率: 约0.2~3.0W

直流无刷电机

典型应用: 医疗器械  
精密仪器  
家用电器  
美容仪器


OUTPUT:APPROX 0.2~3.0W

Brushless DC Motor

Typical Applications: Medical Instruments  
Precision Instrument  
Household Appliances  
Beauty Equipment

## 1.OUTLINE DRAWING:

UNIT:MM

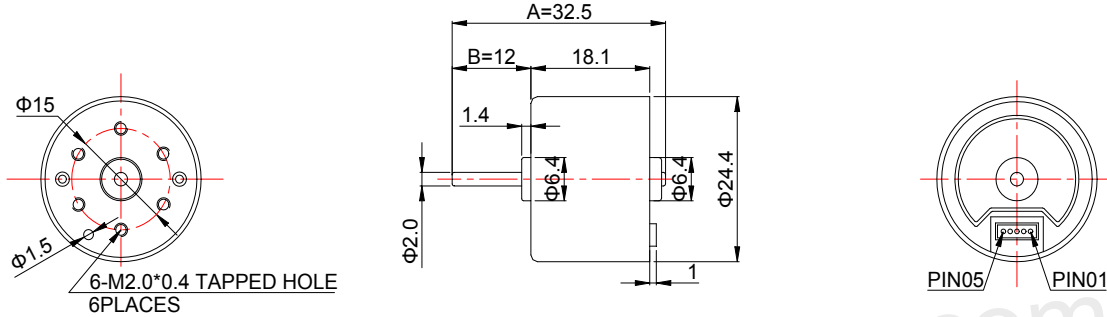

Customizable Parameters:

1. Length A and B
2. Electric Performance

WEIGHT: 30g(Approx)

View:



Connecter Interface

NO.	PIN ARRANGEMENT
1	VCC(Red Wire)
2	FG(Green Wire)
3	CW/CCW(Yellow Wire)
4	GND(Black Wire)
5	PWM(Blue Wire)

## 2.MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT		
		V	rpm	A	rpm	A	g.cm	mN.m	W	g.cm	mN.m	A
BL2418I-067200	6.0~8.0	6.0	7200	0.11	5570	0.38	21	2.06	1.20	96	9.42	1.30
BL2418I-126500	8.0~15.0	12.0	6500	0.04	5100	0.14	21	2.06	1.10	100	9.81	0.52
BL2418I-249000	8.0~26.0	24.0	9000	0.05	6900	0.17	30	2.94	2.12	132	12.95	0.58

